


# DA-JB2300 INSTALLATION MANUAL






This manual is intended for users of the DA-JB2300 junction box. It includes instructions for mounting the DA-JB2300 junction box to a wall.

- ✓ • **This junction box is intended to be used with DC-E & DC-T series model of camera. Do not use it with other models of cameras.**
- **This installation should be performed by a qualified service personnel in conformance to all local codes.**
- **You may need to reinforce the wall. If the wall is not strong enough to support the camera, the camera may fall.**
- **Do not use this product for other purposes.**





## Mounting

Mount the junction box to the wall or mounting bracket as follows:

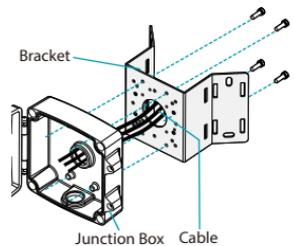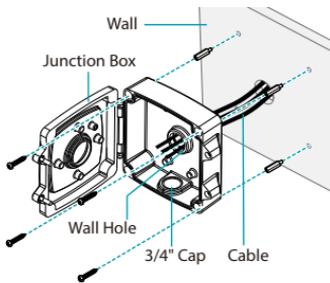

- 1 Insert cables from external devices, network and power adapter to the junction box.
- 2 Mount the junction box to the wall or mounting bracket by using the screws.

- ✓ • Use the provided guide pattern to check the distance between the screw holes if necessary.
- If you want to insert cables through the bottom of the junction box, remove the 3/4" cap and attach it to the wall hole.



- 4 Route the cable from the camera through the rubber and then junction box. Attach the rubber onto the junction box.
- 5 Fix the cables using the cable clamp.
- 6 Connect the cables from external devices, network and power adapter to each port of the camera.

- 7 Close the junction box by using the screws.



**Make sure that the rubber is attached onto the junction box.**


### Connect your camera to the junction box as follows:

- 8 Screw the mounting bracket onto the junction box, then the camera body onto the mounting bracket by using screws.



Use Screw by Model

- M5x16 : DC-E4213, E4513, E4216  
DC-T4233, T4533, T4236
- M5x12 : Others

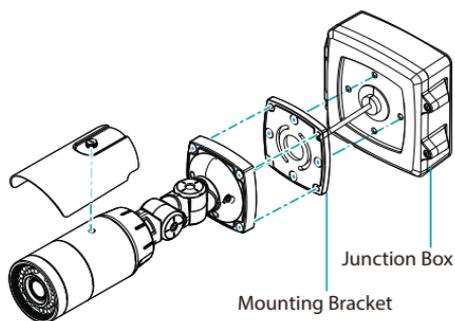

## Dimensions

Unit: mm (inch)

