

DA-PI PoE75U

- Up to 75W of PoE Power
- Compatible with IEEE 802.3af, IEEE 802.3at
- Protects low power devices to receive only the power they need
- Automatic detection and protection of non-standard ethernet terminals
- Support 10/100/1000 Base-T Lan environment




SPECIFICATIONS

RJ45 ETHERNET INTERFACE DATA IN	
Port	1ch
Connectivity	RJ45, Auto-MDI / MDI-X Sensing
Wire Type	CAT5 or Better
Distance	Up to 100m
Transfer Speed	10/100/1000 BASE-T
RJ45 ETHERNET INTERFACE PoE	
Port	1ch
P-in Assignment and Polarity	OUTPUT #1(OUT) 3/6(+), 1/2(-) OUTPUT #2(OUT) 4/5(+), 7/8(-)
PSE Power	56V DC, Max. 75W
Distance	Up to 100m
Speed	10/100/1000 BASE-T
GENERAL	
Dimensions (W x H x D)	80mm x 44mm x 166mm (3.1" x 1.7" x 6.5")
Weight	500g (1.10lb)
Operation Temperature	-20°C ~ +40°C (-4°F ~ 104°F)
Power Input	100 ~240V AC, 50/60Hz, 1.2A
Approvals	FCC, CE, UL

DIMENSIONS

(Unit - mm)

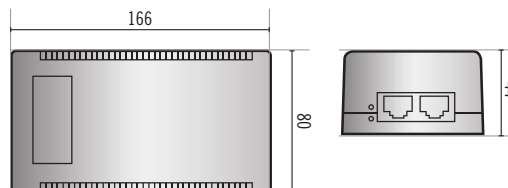

INSTALLATION LAYOUT

