

Single Port PoE Injector

DA-PI1101


- Up to 30W of PoE Power feeding on 2-pairs
- Compatible with IEEE 802.3af, IEEE 802.3at
- Protects low power devices to receive only the power they need
- Automatic detection and protection of non-standard ethernet terminals
- Parallel slide-in design for easy installation



SPECIFICATIONS

RJ45 ETHERNET INTERFACE_DATA In	
port	1 channel
Connectivity	RJ45, Auto-MDI/MDI-X sensing
Wire Type	CAT5 or better
Distance	Up to 100m
Speed	10/100 BASE T
RJ45 ETHERNET INTERFACE_PoE	
port	1 channel
Pin Assignment and Polarity	1,2(+), 3,6(-)
PSE Power	52V DC, Max. 30W
Distance	Up to 100m
Speed	10/100 BASE-T
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
GENERAL	
Dimensions (W x H x D)	87.9mm x 51.3mm x 166mm (3.5" x 2.0" x 6.5")
Weight	350g (0.77lbs)
Operation Temperature	-15°C ~ +45°C (5°F ~ 113°F)
Power Input	100 ~240V AC, 0.8A
Approvals	FCC, CE, KC

DIMENSIONS

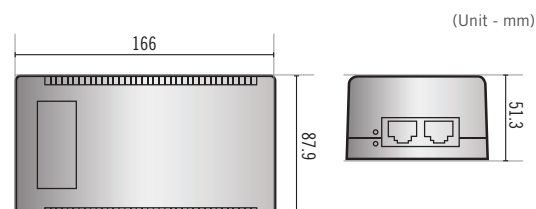

Single Port PoE Repeater

DA-PR1101

- Compatible with IEEE 802.3af
- Supports Data transfer up to 130m distance
- A maximum distance of 490m can be achieved between the NVR and Camera via three DA-PR1101 ethernet extenders
- Supports PoE switch off function via PoE On/Off switch
- Supports plug and play without setting up special IP addresses



SPECIFICATIONS

PoE IN	
Input port	RJ45(10/100 BASE-T)
Connected Devices	NVR / PoE Switch
LEDs	Data, PoE
PoE Out	RJ45(10/100 BASE-T)
OUTPUT PORT	
PSE	IEEE 802.3af
Distance	A maximum distance of 490m can be achieved between the NVR and Camera via three DA-PR1101 ethernet extenders
LEDs	Data, PoE
GENERAL	
Dimensions (WxHxD)	82mm x 28mm x 83mm (3.2" x 1.1" x 3.3")
Weight	118g (0.26lbs)
Operation Temperature	0°C ~60°C (32°F ~140°F)
Certification	FCC, CE, KC

DIMENSIONS

