


FM1400 INSTALLATION MANUAL



This manual is intended for the users of the FM1400 ceiling mounting bracket. It includes the instructions for mounting the FM1400 ceiling mounting bracket to the ceiling.



- **This bracket is intended to be used with some models of dome cameras. Ask your retailer for details on a specific model and do not use it with other models of cameras.**
- **This installation should be performed by a qualified service personnel in conformance to all local codes.**
- **You may need to reinforce the ceiling. If the ceiling is not strong enough to support the camera, the camera may fall.**
- **Do not use this product for other purposes.**


Mounting

1 Assemble the camera body to the bracket by tightening the screws.


- DC-D2233WHX / DC-D3233WRX / DC-D3233RX / DC-D3233X Models: Screw No. 5 (3-point), PCB Support 8.8mm
- DC-D2233R / DC-D2233 Models: Screw No. 4 (2-point), PCB Support 20.4mm
- DC-D2233WHR / DC-D2233WR / DC-D2233W Models: Screw No. 3 (3-point), PCB Support 23.1mm
- DC-D4233WRX / DC-D4233HRX / DC-D4223WRX Models: Screw No. 5 (3-point), PCB Support 20.4mm
- DC-D4233RX / DC-D4223RX Models: Screw No. 4 (2-point) 4ea, PCB Support 8.8mm
- Other Plastic Dome Models: Screw No. 2 (3-point), No PCB support necessary
- Other Vandal Dome Models: Screw No. 1 (3-point), No PCB support necessary

2 Connect the cable through the cable hole and screw the safety wire to the bracket to prevent the bracket from falling on to the floor.


< Screw No. >
(DC-D2233R Model)

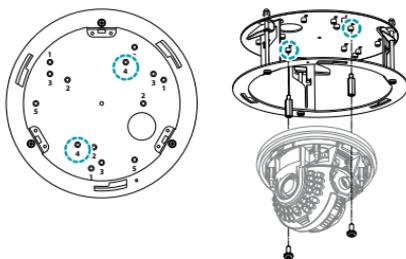


*When using the screws of DC-D4233RX / DC-D4223RX models, combine the two as shown below.

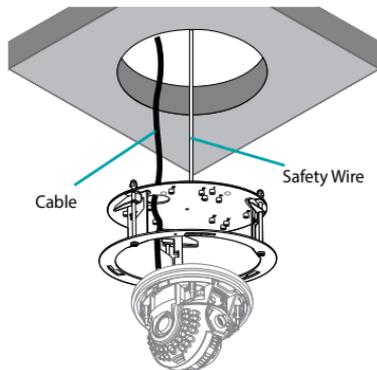


3 Mount the bracket to the ceiling, then fix it with the calmp (3-point) by turning the clamp screws clockwise.

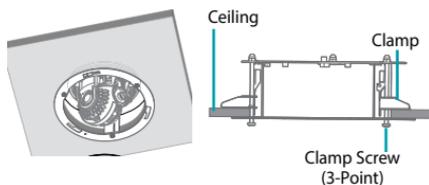

4 Assemble the dome cover to the camera body.

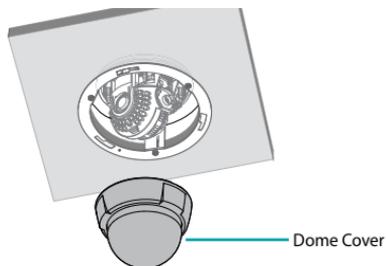

5 Assemble the bracket lid to the bracket.



Dimensions

Unit: mm (inch)

