

## DC-T6224HRXL

- Easy installation with DirectIP NVR
- FullHD (1920 x 1080) resolution
- Manual Vari-focal lens (f=12 - 50mm)
- micro SD/SDHC/SDXC, Smart Failover (Up to 256GB)
- IR LED: Detection Range 100m (328ft)
- License plate capture up to 80km/h or 50 mph (Single Lane: 20m (66ft))
- P-IRIS / ABF (Auto Back Focus) Support
- micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
- True wide dynamic range (WDR)
- Day and night (ICR)
- Two-way audio
- Alarm in / out
- IP66 supports
- Supports ONVIF





### SPECIFICATIONS

VIDEO	
Image Sensor	1/2" CMOS
Max. Resolution	1920 x 1080
Scanning Mode	Progressive Scan
Lens Type	Manual Vari-focal
Focal Length	f=12 - 50mm
Aperture	F1.5 - 1.9
Iris Control	P-IRIS / ABF (Auto Back Focus) Support
Angular Field of View	Wide : 33°(H), 18°(V), 38°(D) Tele : 9°(H), 5°(V), 10°(D)
Min. Illumination	Color Mode : 0.02 lux @F1.5 BW Mode : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1 - 1/5, 1/7.5, 1/15)
Day and Night	IR Cut Filter with Auto Switch
IR Distance (LEDs)	Detection Range 100m (328ft) License plate capture up to 80km/h or 50 mph (Single Lane: 20m (66ft))
Image Setting	Configurable Exposure, White Balance, Sharpness
Backlight Compensation	-
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zone
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Video Out	-
NETWORK	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Supported
Bitrate Control	H.264 - CBR / VBR, H.265 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF
Max. Frame Rate	25ips : 1920 x 1080 30ips : 1920 x 1080
Supported Resolution	1920x1080, 1280x720, 704x480, 640x360, 352x240
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNTp, SMTP, FEN, mDNS, Upnp
Security	SSL Encryption, Multi-user Authority, IEEE 802.1x IP Filtering, HTTPS, SSL Encryption
Remote Access Client	DirectIP NVR Connection, IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTRec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
ALARM AND EVENT	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio In / Out	1 / 1
Alarm In / Out	2 / 1
ENVIRONMENTAL	
Vandal Proof Casing	-
Outdoor Ready	IP66
Operating Temperature	-40°C ~ +60°C (-40°F ~ +140°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
ELECTRICAL	
Power Source	100V ~ 240VAC
Power Consumption	100-240V~, 50/60Hz, 1.0-0.5A, 50W
Approvals	FCC, CE, KC
MECHANICAL	
Dimensions	166.5mm x 129.5mm x 540mm (6.56" x 5.1" x 21.26")
Weight	4.65 kg (10.25 lb)

### DIMENSIONS

(Unit - mm)

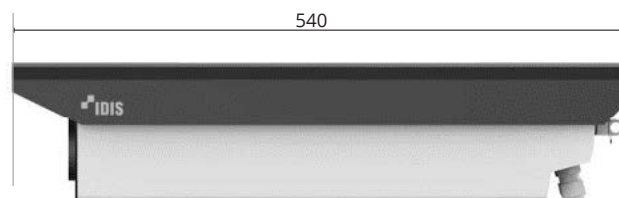

### ACCESSORIES (OPTIONAL)



DA-WM3100

### ACCESSORIES CONFIGURATION TREE



DA-WM3100