

# DH-2010P


- Individual port for data transmission to DirectIP NVR
- PoE (IEEE 802.3af, IEEE 802.3at) compliant
- Maximum per-device PoE delivery of 70W available for 1 ~ 8 RJ45 ports
- Central power control for greater network utility
- Supports 8 FE RJ45 ports and Uplink 2 GbE RJ45 Ports



## SPECIFICATIONS

SYSTEM	
System Memory	256MB SDRAM, 32MB Flash
Switching Capacity	5.6Gbps
CONNECTIVITY	
Copper Service Port	8 RJ45 Connectors (10/100 BASE-T)
Copper Uplink Port	2 RJ45 Connectors (10/100/1000 BASE-T)
Optical Uplink Port	-
PoE POWER	
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
PD Connection	Up to 8 IEEE 802.3af PDs or Up to 2 IEEE 802.3at PDs
PSE Power	70W
GENERAL	
Dimensions (W x H x D)	280mm x 44mm x 180mm (11.0" x 1.7" x 7.1")
Weight	1.35kg (2.97lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
Power Input	AC100-240V, 2.0~1.0A, 50/60Hz
Power Consumption	90W
Approvals	FCC, CE, KC, UL, CB

## DIMENSIONS

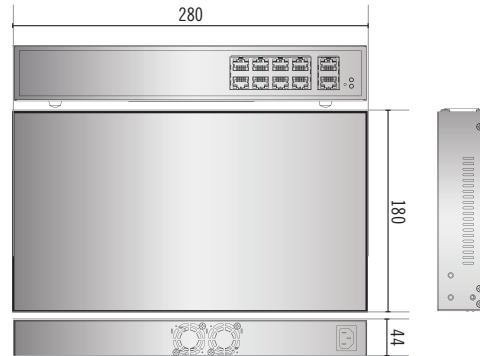

(Unit - mm)