

## DR-1504P



- Total incoming throughput 60Mbps
- Up to 120ips 8MP real-time recording
- Up to 120ips live display
- Easy to install, set-up, and play with DirectIP cameras
- Built-in 4 channel PoE Switch
- Supports one click network configuration through FEN service




### SPECIFICATIONS

VIDEO	
<b>Video Inputs</b>	4 IP Channels
<b>Max. Incoming Throughput</b>	60Mbps
<b>Supported Cameras</b>	DirectIP
<b>Video Outputs</b>	1 HDMI, 1 VGA
<b>Display Resolution</b>	1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200
<b>Display Speed</b>	Up to 120ips
<b>Digital Zoom</b>	x2 ~ x12
RECORDING	
<b>Max. Throughput</b>	20Mbps, 120ips @ 8MP
<b>Recording Resolution</b>	Up to 8MP (Depending on IP Camera)
<b>Compression</b>	H.265, H.264
<b>Recording Mode</b>	Time-lapse, Event, Pre-event, Panic
<b>Trigger Events</b>	Motion Detection, Trip-zone, Tampering, Video Loss, Etc.
PLAYBACK	
<b>Performance</b>	4ch Full HD Synchronous Playback
<b>Search Mode</b>	Time-lapse, Event Log
<b>Digital Zoom</b>	x2 ~ x12
STORAGE	
<b>HDD</b>	SATA x1, (Up to 6TB Capacity, 3.5")
NETWORK	
<b>Client Connection</b>	Fast Ethernet (Client) x 1
<b>Video In Connection</b>	Fast Ethernet (IP Camera) x 4
<b>Transmission Speed</b>	20Mbps
<b>Camera Power</b>	PoE (IEEE 802.3at Class 4) Supported 4 Ports, 30W
<b>Remote Data Export</b>	IDIS Player, AVI, JPG
<b>Event Notification</b>	Email (MP4), Callback to Remote S/W, Push Notification (IDIS Mobile)
<b>Two-way Audio</b>	No
<b>Client Viewer</b>	IDIS Center, IDIS Mobile, IDIS Solution Suite, IDIS Web(web.idisglobal.com only)
INTERFACE	
<b>Audio In / Out</b>	No
<b>Alarm In / Out</b>	No
<b>Alarm Reset In</b>	-
<b>Serial Interface</b>	No
<b>USB</b>	USB 2.0 x 2
<b>User Interface</b>	Mouse
GENERAL	
<b>Operating System</b>	Embedded Linux
<b>Unit Dimensions (W x H x D)</b>	205mm x 44.5mm x 216.4mm (8.07" x 1.75" x 8.52")
<b>Unit Weight</b>	1.2kg (2.65 lb) (with 1 HDD)
<b>Working Temperature</b>	0°C to 40°C (32° F ~ 104° F)
<b>Operating Humidity</b>	0% ~ 90%
<b>Power Input</b>	NVR Adaptor (Input : 100-240V~, 50/60Hz, 1.2A, Output : 48V, 1.0A)
<b>Power Consumption</b>	NVR: 48V, 0.85A, Max. 40.8W PSE : Max. 30W
<b>Approvals</b>	KC, CE, FCC

### DIMENSIONS

(Unit - mm)

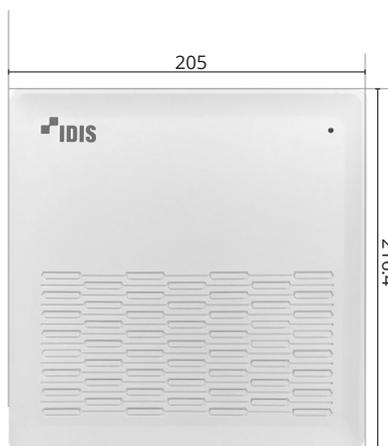

- ① USB Ports
- ② HDMI Out Port
- ③ VGA Out Port
- ④ Network Port
- ⑤ Video In / PoE Ports
- ⑥ Power In Port (48V)

\* Maximum HDD capacity will be updated as new HDD models become available.  
For the most recent information, please check [http://designtool.idisglobal.com/design\\_tool/product\\_compatibility.php](http://designtool.idisglobal.com/design_tool/product_compatibility.php)