

# DR-6332PS-SA


- Total incoming throughput 370Mbps
- Up to 960ips UHD real-time recording
- Supports H.265 / H.264 codec
- Supports UHD display
- Up to 960ips live display
- Easy to install, set-up, and play with DirectIP cameras
- Built-in 16 channel PoE Switch and expandable up to 32 channel using DirectIP Gigabit PoE Switch
- Expandable up to 124TB using eSATA storage
- Supports RAID 1
- Supports one click network configuration through FEN service
- Supports third party cameras (Axis, Panasonic, ONVIF)




## SPECIFICATIONS

| VIDEO                              |  |
|------------------------------------|--|
| <b>Video Inputs</b>                | 32 IP Channels   |
| <b>Max. Incoming Throughput</b>    | 370Mbps  |
| <b>Supported Camera</b>            | DirectIP, Axis, Panasonic, ONVIF   |
| <b>Video Outputs</b>               | 1 HDMI, 1 VGA  |
| <b>Display Resolution</b>          | HDMI : 3840 x 2160, 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200<br>VGA : 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200 |
| <b>Display Speed</b>               | Up to 960ips   |
| <b>Digital Zoom</b>                | x2 ~ x12   |
| RECORDING                          |  |
| <b>Max. Throughput</b>             | 230Mbps, 960ips@UHD  |
| <b>Recording Resolution</b>        | Up to 12MP (Depending on IP Camera)  |
| <b>Compression</b>                 | H.265, H.264   |
| <b>Intelligent Codec</b>           | Supported  |
| <b>Recording Mode</b>              | Time-lapse, Event, Pre-event, Panic  |
| <b>Trigger Events</b>              | Alarm In, Audio Detection, Motion Detection, Trip Zone, Tampering, Video Loss, Text-in, ANPR, Etc.                                   |
| PLAYBACK                           |  |
| <b>Performance</b>                 | 16ch Full HD Synchronous Playback<br>4ch 4K Playback   |
| <b>Search Mode</b>                 | Time-lapse, Event Log, Thumbnail, Motion, Text-in  |
| <b>Digital Zoom</b>                | x2 ~ x12   |
| STORAGE                            |  |
| <b>HDD</b>                         | SATA x6, eSATA x4, RAID 1 supported  |
| NETWORK                            |  |
| <b>Client Connection</b>           | Gigabit Ethernet (Client) x 1  |
| <b>Video In Connection</b>         | Gigabit Ethernet (IP Camera) x 16 + Gigabit Ethernet (Ext) x 1   |
| <b>Transmission Speed</b>          | 50Mbps / 100Mbps (BRP Mode)  |
| <b>Camera Power</b>                | PoE (IEEE 802.3at Class 4) Supported 16 Ports, 120W  |
| <b>Remote Data Export</b>          | IDIS Player, AVI, JPG  |
| <b>Event Notification</b>          | Email (Attach Clip (.cbf).MP4), Callback to Remote S/W, Push Notification (IDIS Mobile)  |
| <b>Two-way Audio</b>               | Yes  |
| <b>Client Viewer</b>               | IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite  |
| INTERFACE                          |  |
| <b>Audio In / Out</b>              | Local (NVR) : 1 RCA / 1 RCA + 1 HDMI<br>IP Camera : 32 / 32 (Depending on IP Camera)   |
| <b>Alarm In / Out</b>              | Local (NVR) : 4 / 1<br>IP Camera : 32 / 32 (Depending on IP Camera)  |
| <b>Alarm Reset In</b>              | 1  |
| <b>Serial Interface</b>            | RS232 (Terminal Block), RS485 (Terminal Block)   |
| <b>USB</b>                         | USB 2.0 x 1, USB 3.0 x 1   |
| <b>User Interface</b>              | Mouse, IR Remote Control, Network Remote Keyboard  |
| GENERAL                            |  |
| <b>Operating System</b>            | Embedded Linux   |
| <b>Unit Dimensions (W x H x D)</b> | 430mm x 88mm x 412.8mm (16.9" x 3.5" x 16.25")   |
| <b>Unit Weight</b>                 | 6.0kg (13.2lb) (With 1 HDD)  |
| <b>Working Temperature</b>         | 0°C to 40°C (32°F ~ 104°F)   |
| <b>Operating Humidity</b>          | 0% ~ 90%   |
| <b>Power Input</b>                 | AC 100-240 V, 50/60Hz, 3.0 - 1.5A  |
| <b>Power Consumption</b>           | 100-240V~, 50/60Hz, 3.0-1.5A, 200W   |
| <b>Approvals</b>                   | FCC, UL, CE, CB, KC, PSE   |

## DIMENSIONS

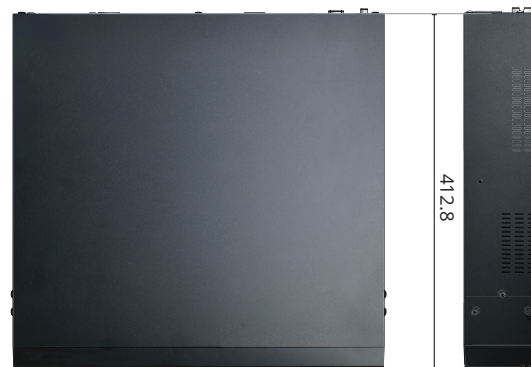

(Unit - mm)

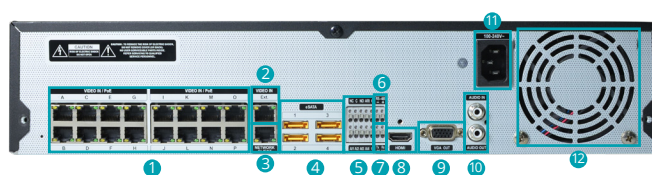

- |                        |                  |
|------------------------|------------------|
| 1 Video In / PoE Ports | 7 RS-232 Port    |
| 2 Video In / Ext. Port | 8 HDMI Out Port  |
| 3 Network Port         | 9 VGA Out Port   |
| 4 eSATA Ports          | 10 Audio Ports   |
| 5 Alarm Connection     | 11 Power In Port |
| 6 Ports<br>RS-485 Port | 12 Vent          |

## ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104

\* Maximum HDD capacity will be updated as new HDD models become available.  
For the most recent information, please check [http://designtool.idisglobal.com/design\\_tool/product\\_compatibility.php](http://designtool.idisglobal.com/design_tool/product_compatibility.php)