

DR-8364 Series NVR

- Support up to 256 IP Cameras
- Recording data rate up to 1024 Mbps
- Support H.264, H.265 Compression
- Intelligent Codec
- Dual Redundant Power Supplies
- NVR Failover Support
- Supports ONVIF




SPECIFICATIONS

VIDEO				
Models Variant	DR-8364-W32	DR-8364-W64	DR-8364-W128	DR-8364-W256
Number of Cameras	32 Channels	64 Channels	128 Channels	256 Channels
Display Resolution	Up to 4K UltraHD			
Software	iNEX-IDIS Solution Suite			
Supported Video Protocol	DirectIP, ONVIF, RTSP			
Resolution	Support up to 4K Ultra HD			
Client	IDIS Solution Suite, IDIS Mobile, IDIS Web			
Controls	Mouse, Digital Network Keyboard (Joystick)			
RECORDING				
Recording Data Rate	320 Mbps	400 Mbps	768 Mbps	1024 Mbps
Recording Resolution	Up to 12MP (Depending on IP Camera)			
Recording Frame Rate	25 FPS per Channel (Depending on IP Camera)			
Supported Image Resolution	3840 x 2160 , 1920x1080, 1280x720, 640x360 (Depending on IP Camera)			
Compression	H.264, H.265			
Intelligent Codec	Supported			
Recording Mode	Time Lapse (Continuous, Schedule), Event (Motion Detection, Object Detection, Video Loss, Video Blind, Alarm In)			
Panic Recording	Yes			
PLAYBACK				
Performance	16ch Full HD Synchronous Playback			
Search Mode	Time-Lapse, Event, Text-In, Thumbnail			
Export	IDIS Self-Player, AVI, JPG			
Notification	Alarm Out, Email, Event Acknowledgement, Live Popup, Move PTZ, Event Log			
NETWORK				
Interface	1x Ethernet (10/100/1000 Mbps Base-T)			
Protocol	TCP/IP, IPV4/IPV6, DHCP, DNS, DDNS, RTSP, RTP, HTTP, HTTPS, TCP, UDP, FTP, SMTP, Upnp, NTP			
Discovery Interface	IDIS Discovery			
STORAGE				
Internal	Supports Up to 80TB			
External	SAN/NAS Compatible			
SYSTEM				
Operating System	Embedded Windows			
Operating System Version	Microsoft Windows 10 IOT Enterprise			
Memory	8GB	16GB	16GB	32GB
Hard Disk Support	SATA, SSD			
Communication Ports	4x USB, 1x Serial			
Video Outputs	1x HDMI			
ELECTRICAL				
Power Input	AC 100-240 V, 50/60Hz, 2.0 - 1.0A (REDUNDANT SMPS)			
Power Supply	Dual Redundant Power Supplies			
Power Consumption	100-240V~, 50/60Hz, 2.0-1.0A, 120W			
ENVIRONMENTAL				
Operating Temperature	0° to 40°C (32° to 104°F)			
Operating Humidity	0% ~ 90%			
MECHANICAL				
Form Factor	19" Rack Mount, 2U			
Dimension (W x H x D)	482.6mm x 88mm x 523.3m (19" x 3.5" x 20.6")			
Weight	11.2Kg (24.6lb) (without HDDs)			
GENERAL				
Certifications	BIS			

DIMENSIONS

(Unit - mm)

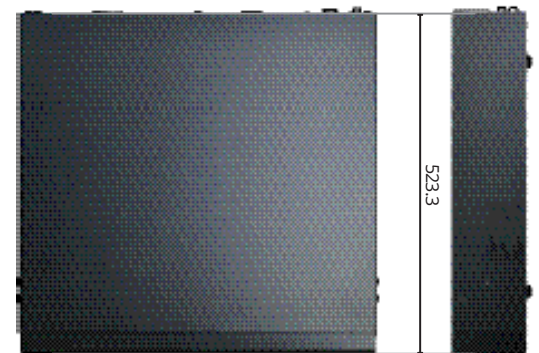

ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104