

## VA in the Box

# DV-1104




- Specialized in DirectIP NVR
- Supports 4 channel IP Camera
- Supports People Counting
- Supports Heatmap
- Supports Queue Management



## SPECIFICATIONS

DECODER	
Video Compression	H.264, H.265
Video Input	4ch IP
Supported Devices	DR-6308P, DR-6316PS, DR-6332PS, DR-8364, DR-8364D, DR-2304P, DR-2308P, DR-2316P, DR-8416, DR-8432, DR-8432D
Max. Network Throughput	20Mbps
Network Connection	Gigabit Ethernet x 1
VA Support	People Counting Heatmap Queue Management (Max. 3 queues)
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.74kg (1.6lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 3)
Power Source	12VDC, PoE
Power Consumption	6.6W
Approvals	FCC, CE, KC

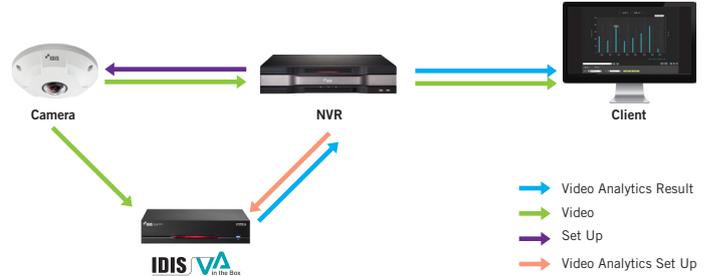

## Analytic Reports Reports and graphs

Report with graphs and thumbnails by setting a time period. Periodical analysis for each feature is available through the VMS "VA report" tab. You can check hourly/daily/weekly/monthly data in detail by simply entering a date and time. The data from the People Counting, Queue Management, and Heat Map functions can be reviewed individually or collectively.

## DirectIP 16 Channel Decoder

# DD-1216

- Specialized in DirectIP NVR
- Supports IDIS IP Camera
- Supports HDMI, VGA, CVBS port
- Up to 4 channel Full HD display
- Up to 16 channel real-time display



## SPECIFICATIONS

DECODER	
Video Compression	H.264, H.265
Video Input	16ch IP
Video Input Resolution	Up to 12MP
Supported Devices	DirectIP NVR, IDIS IP Camera
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI, VGA : 3840 x 2160, 2560 x 1440, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200, 420 x 480, 720 x 576 CVBS : 640 x 480
Display Speed	Up to 480ips
Max. Network Throughput	50Mbps
Network Connection	Gigabit Ethernet x 1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.78kg (1.72lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	12.7W
Approvals	FCC, CE, KC

## DIMENSIONS

