

DirectCX 4channel H.265 Recorder

TR-1504





- Supports Multi Standard Analog Camera
- Up to 120ips Full HD Recording
- H.265 encoding , Intelligent Codec Support
- Up to 5MP Resolution Support
- Full HD Display with HDMI and VGA output
- Supports CVBS Spot Monitor
- Long Transmission Distance Over Coax Cable
- Supports OSD Control Over Coax
- Supports One Click Network Configuration Through FEN Service



SPECIFICATIONS

VIDEO	
Video Inputs	4 BNC (Analog and HD-TVI)
Supported Camera Types	5MP20, 5MP12, 4MP30, 4MP25, 4MP15, 3MP18, 1080P30, 1080P25, 720P30, 720P25, CVBS(NTSC/PAL)
Video Outputs	1 HDMI, 1 VGA, 1 BNC(Spot)
Display Resolution	HDMI / VGA : 1920 x 1080, 1280 x 1024 Composite : 720 x 480(NTSC), 720 x 576(PAL)
Display Speed	Up to 120ips
Digital Zoom	x2 ~ x7
RECORDING	
Recording Resolution	5MP, 4MP, 3MP, 1920x1080, 1280x720, 960x576, 960x480, 720x576, 720x480, 960x288, 960x240, 640x360, 720x288, 720x240, 480x288, 480x240, 360x288, 360x240
Frame Rate	120ips@1080P, 72ips@3MP, 60ips@4MP, 40ips@5MP
Compression	H.265, H.264, Intelligent Codec
Recording Mode	Time-Lapse, Event, Pre-Event, Panic
Trigger Events	Alarm in, Motion detection, Video loss
PLAYBACK	
Performance	4ch 1080p Synchronous Playback
Search Mode	Time-lapse, Event log
Digital Zoom	x2 ~ x7
STORAGE	
HDD	SATA x1
Total Capacity	6TB=6TB x 1
Data Export Device	USB HDD, USB Stick
NETWORK	
Client Connection	Fast Ethernet x1
Transmission Speed	30ips@Full HD per channel, same as recording stream
Remote Data Export	IDIS Player, AVI, JPG, BMP
Event Notification	Email (attach clip cbf, mp4), Callback to Remote S/W, Push notification (IDIS Mobile)
Two-way Audio	Yes
Client Viewer	IDIS Center, IDIS Mobile, IDIS Solution Suite, IDIS Web(web.idisglobal.com only)
INTERFACE	
Audio In / Out	1 RCA / 1 RCA + 1 HDMI
Alarm In / Out	4 In / 1 Relay Out
Alarm Reset In	-
Serial Interface	USB 2.0 x 2
User Interface	Mouse, Network Remote Keyboard
GENERAL	
Operating System	Embedded Linux
Unit Dimensions (W x H x D)	205mm x 44.5mm x 223.4mm(8.07" x 1.75" x 8.80")
Unit Weight	1.3kg (with 2TB HDD)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Power Input	(a) US/JP Adaptor Input : 100-240V AC, 50/60Hz, 1.0A, Output : 12V DC, 3A (b) UK, ETC Adaptor Input : 100-240V AC, 50/60Hz, 1.2A, Output : 12V DC, 3A (c) KR Adaptor Input : 100-240V AC, 50/60Hz, 0.8A, Output : 12V DC, 3A
Power Consumption	12V=, 0.75A, 9W
Approvals	FCC, KC

DIMENSIONS

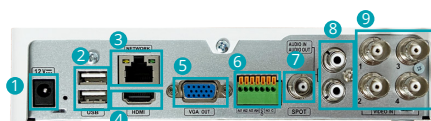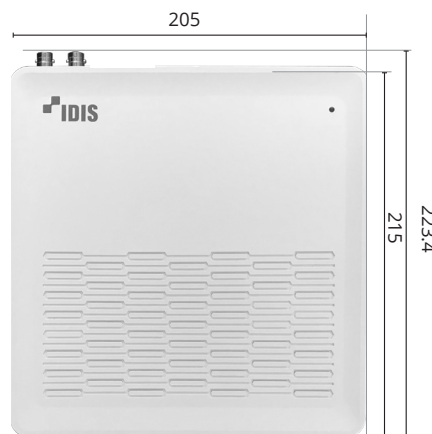

- 1 Power In Port
- 2 USB Ports
- 3 Network Port
- 4 HDMI Out Port
- 5 VGA Out Port
- 6 Alarm Connection
- 7 SPOT
- 8 Audio In / Out
- 9 Video Input