


# UBio-X Face

## Face Recognition Terminal



- **Walk-Through method** Face Recognition at a distance up to **3m**
- Face Authentication under illuminance up to **25,000 Lux**
- **Liveness Detection**
- **Anti-Spoofing** attacks against photos, videos & 3D masks
- **Easy Face Enrollment**, Using Camera or Phone Pictures
- **Temperature Detection** combines Face Recognition system
- Easy installation with **PoE** (Optional)

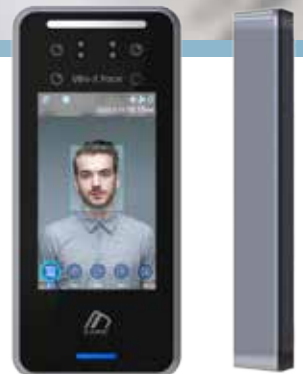

**UNION**  
COMMUNITY

# UBio-X Face



## SPECIFICATIONS

Biometric	Face	
Dust & Waterproof	IP65	
CPU	Cortex-A9 Quad Core 1.4GHz	
Memory	16GB Flash + DDR3 512MB x 4 (2GB)	
Display	5" Color Touch Screen	
Capacity	Up to 500,000 Users (1Card : 1User) Up to 20,000 Users (1Face : 1User) Face 1:20,000 < 1sec	Event Logs : 10,000,000 Photo Logs : 20,000
Interface	External I/O, TCP/IP, RS-232, RS-485, Wiegand, PoE (Optional), HID Prox, iClass (Optional)	
Dimension (W x H x D) mm	94 x 224 x 35.5	

## APPLICATION FIELDS



Construction Sites



Medical Centers



Religious Facilities



Events



Commercial Facility

## TYPES



Standard



Movable



Desk



Wall-Mounted



Gate