

Powerful Scalability with Easier Integration

for Increased Security Control and Monitoring IDIS HDMI / VGA Video Encoder HE-1101



IDIS HDMI / VGA Video Encoder delivers an immediate integrated monitoring environment, even when using varied products.

It provides an ideal solution for integrated building monitoring, shopping malls, hotels, high-resolution monitoring centers, schools, corporate training environments, and more.

Key Features



Integrated Monitoring

Integrated monitoring, even for users of other products



Remote Control Easy and secure remote control with USB



Intelligent Codec Delivers up to 90% storage savings



IDIS HDMI / VGA Video Encoder

HE-1101



- Easy integration with 3rd party systems
- Quadruple streaming
- Supports HDMI and VGA input ports
- Supports DirectIP, IDIS Protocols and ONVIF
- Remote mouse and keyboard control through USB interface


SPECIFICATIONS

| ENCODER | |
|------------------------|---|
| Video Codec | H.265, H.264, M-JPEG, Intelligent Codec |
| Max. Frame Rate | 1920 x 1080 @ 30ips |
| Bitrate | Up to 10MP |
| Max. Resolution | 1920 x 1080 |
| Streaming | Quadruple Stream |
| Built in OSD | English, Korean |
| Input | 1 x HDMI, 1 x VGA |
| Output | 1 x HDMI (Input Bypass), 1 x VGA (Input Bypass) |
| Audio In / Out | 1 x line in (3.5mm), 1 x line out (3.5mm) |
| Serial Interface | 1 x USB Type B |
| Network Interface | 1 x RJ45 (10 / 100) |
| IP Camera Protocol | DirectIP™, IDIS Protocol, ONVIF |
| GENERAL | |
| Dimensions (W x H x D) | 200mm x 44mm x 153mm (7.9" x 1.7" x 6.0") |
| Weight | 0.84kg (1.85lb) |
| Operation Temperature | 0°C ~ 40°C (32°F ~ 104°F) |
| PoE (Class) | Yes (IEEE 802.3af Class 3) |
| Power Source | 12VDC, PoE |
| Power Consumption | 10W |
| Approvals | FCC, CE, KC |


Direct IP

APPLICATIONS


1. PoS Monitoring for Small to Mid-sized Businesses




2. Central Control for Multi-site Installations

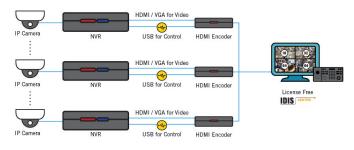

3. Monitoring of Customer Support Staff Computer Screens for Auditing Purposes



4. Integrated Security Monitoring for a Building Management System





IDIS HQ

IDIS Tower, 344 Pangyo-ro Bundang-gu, Seongnam-si Gyeonggi-do, 13493 Republic of Korea

DIMENSIONS

200



IDIS America 801 Hammond Street Suite 200 Coppell, TX 75019 U.S.A.

153

ŧ

- ambam

+1 469 444 6538
+1 469 464 4449
sales_americas@idisglobal.com

IDIS Europe 1000 Great West Road Brentford, Middlesex TW8 9HH The United Kingdom

(Unit - mm)

1 +44 (0)203 657 5678 **5** +44 (0)203 697 9360 **E** uksales@idisglobal.com IDIS Benelux De Slof 9 5107 RH Dongen The Netherlands

T +31 (0)162 387 247 **F** +31 (0)162 311 915 **E** sales@bnl.idisglobal.com

D-308, DSO HQ Bldg Dubai Silicon Oasis Dubai, U.A.E. 1 +971 4 501 5434 2 +971 4 501 5436 5 sales_mena@idisglobal.com

IDIS Middle East

P.O. Box 341037

Cone Solution. One Company.

IDIS and identifying product names and numbers herein are registered trademarks of IDIS Co., Ltd. All non-IDIS brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status, and/or specifications are subject to change without notice. Copyright © IDIS Co., Ltd. All rights reserved.

For more information, please visit