


HD Vandal-resistant IR Dome Camera

DC-D1122WR

- Easy installation with DirectIP NVR
- HD (720p) resolution
- Vari-focal lens (f=3.3 - 10mm)
- Vandal proof / IP66 supports
- PoE (IEEE 802.3af class 2), 12V DC
- Day&night (ICR)
- IR LED (Distance : 20m)
- 3-axis mechanical design for installation
- Supports ONVIF

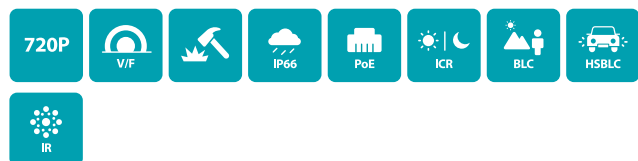

SPECIFICATIONS

VIDEO		
Image Sensor	1/2.7" CMOS	
Max. Resolution	1280 x 720	
Scanning Mode	Progressive Scan	
Lens type	Vari-focal	
Focal Length	f=3.3 - 10mm	
Aperture	F1.5 - 2.5	
Iris Control	DC Auto Iris	
Angular Field of View	Wide : 105.5°(H), 55.4°(V), 125.3°(D) Tele : 35.3°(H), 19.7°(V), 40.4°(D)	
Pan/Tilt Range	Pan: -167° ~ 167°, Tilt: 0° ~ 80°, Rotate: -176° ~ 176°	
Min. Illumination	COLOR : 0.6 lux @ F1.5 B/W : 0 lux (IR LED ON)	
S/N Ratio	more than 45dB	
Dynamic Range	more than 70dB	
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/8000), Anti-Flicker, Slow Shutter(1/7.5, 1/15)	
Day & Night	IR cut filter with auto switch	
IR Distance (LEDs)	20m (18ea)	
Image Setting	Configurable Exposure, White Balance, Sharpness	
Digital Noise Reduction	Configurable 2DNR/3DNR	
Backlight Compensation	On / Off / HSBLC	
Image Stabilizer	-	
Privacy Masking	16 Zones	
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone	
Video Out	1 Terminal Block	
NETWORK		
	DirectIP Mode	Compatibility Mode
Video Compression	H.264(MP), M-JPEG	
Bitrate Control	H.264 - CBR / VBR	
Max. Frame Rate	30fps : 1280 x 720	
Audio Compression	-	
Two-way audio	-	
IP Camera Protocol	DirectIP	IDIS ONVIF Profile S
Supported Resolution	1280x720, 704x480, 640x360, 352x240	1280x720, 704x480, 352x240
Multi-Video Streaming	Quadruple streaming	Triple streaming
Network Protocols	Direct IP Protocol	RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNTP, SMTP, FEN, mDNS, uPNP
Security	SSL Encryption	Multi-User Authority, IEEE 802.1x IP Filtering, HTTPS, SSL Encryption
Remote Access Client	DirectIP™ NVR connection	IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45(10/100BASE-T)	
Edge Storage	-	
ALARM & EVENT		
Trigger Event	Motion Detection, Tampering, TripZone	
Event Buffering (Pre & Post)	yes (up to 60MB)	
Event Notification	Remote S/W, Email (with Image)	
Audio In/ Out	-	
Alarm In/ Out	-	
ENVIRONMENTAL		
Vandal-proof Casing	Yes	
Out-door Ready	IP66	
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F) *Starting up at above 0°C (32°F)	
Operating Humidity	0% ~ 90%	
ELECTRICAL		
Power Source	12VDC, PoE (IEEE802.3af class 2)	
Power Consumption	5.6W	
Approvals	FCC, CE(50130-4), KC	
MECHANICAL		
Dimensions	Ø160mm x 122mm (Ø6.3" x 4.81")	
Weight	0.87 kg (1.92 lb)	



DIMENSIONS

(Unit - mm)



ACCESSORIES(OPTIONAL)



ACCESSORIES CONFIGURATION TREE

